



Precision moulded ABS clear inline VA meter



**Accuracy:** ± 4% Full scale

**Temperature Range:** 60°C Maximum

**Materials:**


- Float: ABS Coated Steel
- Guide Rod: 616 St St if applicable
- Seals: Silicone rubber
- Body: Clear ABS

**Max Overpressure:** 7 bar (100psi)

**Weight:** Variable

**Thread:** ½" ¾" 1 ½" 2"

1. Joint Pipe
2. Screw-cap
3. O-ring
4. Upper Stop Plate
5. Scale
6. Taper Tube
7. Float
8. Lower Stop Plate

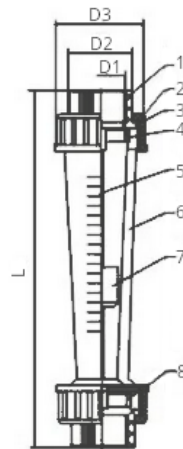

Model		Rate - 20°C	Rate - 20°C	Thread
BFM15	Water		10-100 L/hr 16-160 L/hr 25-250 L/hr 40-400 L/hr 60-600 L/hr	½" BSP
BFM25	Water		100-1000 L/hr 160-1600 L/hr 250-2500 L/hr 300-3000 L/hr	¾" BSP
BFM50	Water	0.4-4 m <sup>3</sup> /hr 1-10 m <sup>3</sup> /hr 1.6-16 m <sup>3</sup> /hr 2.5-25 m <sup>3</sup> /hr		1 ½" BSP
BFM65	Water	5-25 m <sup>3</sup> /hr 8-40 m <sup>3</sup> /hr 12-60 m <sup>3</sup> /hr		2" BSP
BFM15	Air	1-10 m <sup>3</sup> /hr 2.5-25 m <sup>3</sup> /hr		½" BSP
BFM25	Air	10-100 m <sup>3</sup> /hr		¾" BSP