



FEATURES:

- High precision, stable performance and easy operation
- 4-digit LED display for clear measurement readings
- 8 measurements per second sampling rate
- Can be used with transmitters, pressure sensors, liquid level sensors, weighing sensors and more.

SPECIFICATIONS:

Power Supply: 90-260V AC/DC or 18-30V DC

Consumption: ≤ 5VA

Accuracy: 0.3% F.S ± 2 digit


Sampling Cycle: ≤ 8 times/second

Alarm: RELAY: normally open, AC 250V/3A, DC30V/3A

Analogue: 0-10V or 4-20mA, free set for control output range by software

Auxiliary Power: 12/24V/30mA

Weight: ≤250 grams

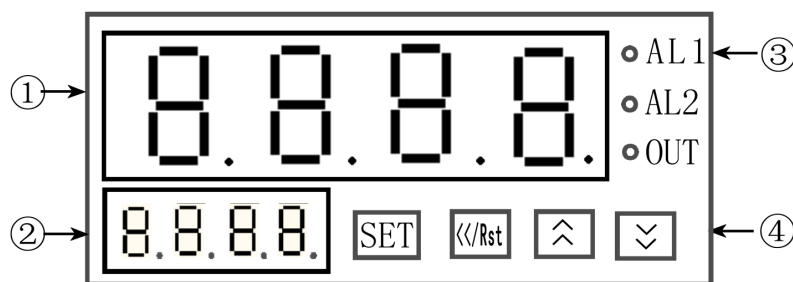

1. PV value/parameter symbols
2. Parameter value / AL1
3. Indication lamps: On - active, Off - inactive
AL1: alarm 1 **AL2:** alarm 2 **OUT/OUT1:** output
4. Operation keys:
SET: Select or Confirm **<</Rst:** Shift or Clear or Reset **↕** Up key **↘** Down key